SOPS76BL

30" BUILT-IN MULTI-FUNCTION OVEN

Porter & Charles

SOPS76BL

30" Multi-function Oven



OVEN PROGRAMS

- True Fan Convection
- Pizza Mode
- Conventional Cooking
- High Bake
- Turbo Grilling
- Fast Grilling
- Grilling
- Fan Assist
- Defrost

OVEN FEATURES

- 120L (4.3 cu. ft) capacity
- heat-activated catalytic liners for a continuous clean
- 9 cooking functions including True Fan Convection
- hot air cooking technology for perfect cooking
- LCD touch display with electronic temperature control
- Oven power indicator and temperature pilot light
- Audible signal for set temperature
- Panoramic view window
- Metric and Imperial baking chart on interior of door
- 5 shelf positions
- Triple glazed glass door
- Cooling fan
- Residual heat indicator

OVEN ASSESSORIES

- Grill/roasting pan
- Reversible grill insert
- 2 chrome oven racks : 22" W x 15^{1/4}"
- Full extension telescopic rails (1 pair)
- Optional bottom vent grill (7427640) available

Specifications

SOPS76BL

OVEN DIMENSIONS

- D: 22^{3/4"} x W: 29^{3/4"} x H: 24"
- D: 578 mm x W: 756 mm x H: 610 mm

CUT-OUT DIMENSIONS

- D: min. 22^{1/4}" x W: 28^{7/16}" x H: 24^{3/16}"
- D: min. 565 mm x W: 723 mm x H: 614 mm

31" sq.

CONDO ELECTRICAL REQUIREMENTS

208 Volt, 60Hz, 3460 Watt, 20 AMP

HOUSE ELECTRICAL REQUIREMENTS

240 Volt, 60Hz, 4580 Watt, 30 AMP

IMPORTANT


PORTER&CHARLES ovens are supplied with a 3' 10" long wired to the electrical supply

VOID CUT-OUT

- If the oven is mounted in a tall or demi-tall cabinet, there must be a minimum gap of 19/16" (4cm) cut out of the shelf and behind the upper cabinet to allow air to flow freely
- A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the void.
- Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Optional bottom vent grill (7427640) available.

FALSE BACKS

Install false backs for storage spaces. This will prevent contents from falling through the vent space. In addition, warm air will not interfere with your stored contents

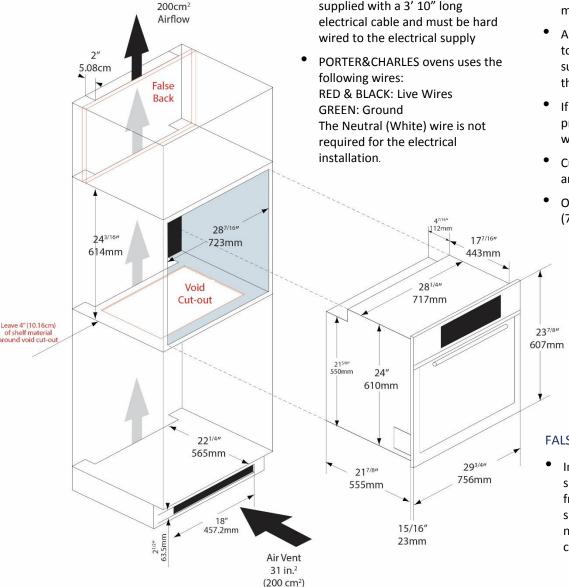

Specifications

SOPS76BL

AIRFLOW REQUIREMENTS

- If the oven is being placed under the counter, there must be a minimum gap of 19/16" (4cm) cut out of the shelf behind the oven to allow air to flow freely.
- A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the void.
- Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Bottom vent grill (7427640) available.

